

sa1-Product specification

Dimensions:



Features:

1. Delicate and compact, Aluminum Alloy, Easy to dissipate heat and fall protection.
2. Use 2.5' SATA III SSD as the storage subject, which is more stable.
3. Type-C interface, suitable for a variety of environments, faster and more stable.
4. Phison S11/SMI2258XT master control, safer and more stable.
5. Original goodie, which's durable.
6. 10 times higher reading and writing speed than HDD, Feel better.
7. Integrated testing, high temperature aging, safer, and more secure.

Capacity	128g	256g	512g	1t	Master/Chips
Read	400m/s	450m/s	470m/s	500m/s	ps s-11/sim2258xt
Write	300m/s	350m/s	380m/s	420m/s	Micron/Toshiba
Input voltage	5V±5%	5V±5%	5V±5%	5V±5%	
Input Current	500ma/h	500ma/h	500ma/h	500ma/h	

Test Data:

CrystalDiskInfo 6.2.1

文件(F) 编辑(E) 功能(u) 主题(T) 硬盘(D) 帮助(H) 语言(L)(Language)

● 良好 36 °C
● 良好 36 °C
C: D: F: E:

健康状况: **良好**



温度: **36 °C**

InMSS114/256G 256.0 GB

固件: SBFQ61.2
序列号: 201811120026
接口: Serial ATA
传输模式: SATA/600 | SATA/600
驱动器号: E:
标准: | ----

支持的功能: S.M.A.R.T., NCQ, TRIM

ID	属性名称	当前值	最差值	临界值	原始值
01	读取错误率	100	100	50	000000000000
05	重新分配磁区计数	100	100	50	000000000000
09	通电时间	100	100	0	000000000000
0C	启动-关闭循环次数	100	100	0	000000000001
A1	厂商特定项目	100	100	0	000000000233
A3	厂商特定项目	100	100	50	000000000071
A5	厂商特定项目	100	100	0	000000000001
A6	厂商特定项目	100	100	0	000000000000
A7	厂商特定项目	100	100	0	000000000000
AC	厂商特定项目	100	100	0	000000000000
AD	厂商特定项目	100	100	0	000000000000
C0	不安全关机计数	100	100	0	000000000001
C2	温度	64	64	0	002400210024
C4	再分配磁区物理位置事件计数	100	100	0	000000000000
C6	无法修正的扇区总数	100	100	0	000000000000
F1	主机写入量总计	100	100	0	000000000032
F2	主机读取量总计	100	100	0	00000000002E

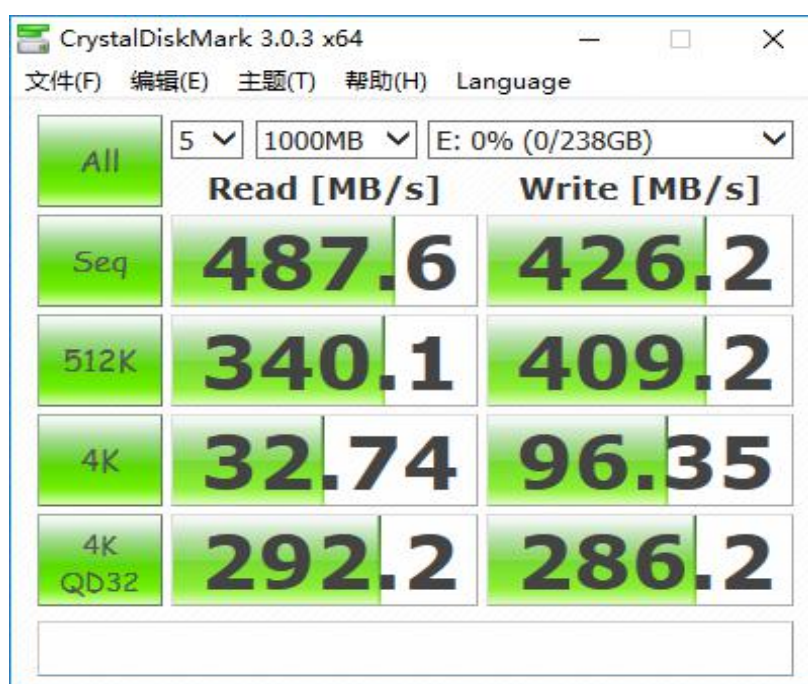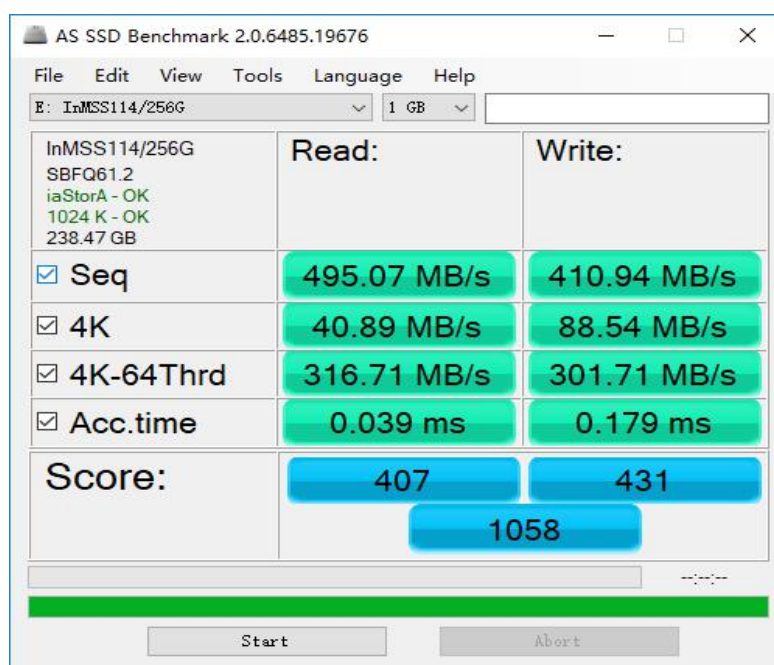

Protection Features	Overload	Overload protection from 110% to 115% of rated power, protection mode, disconnection
	Overvoltage	overvoltage protection from 110% to 115% of rated voltage, protection mode, disconnection
	Over temperature	-55℃ - 90℃, exceeding the temperature start temperature protection.
circumstance	Operating temperature	-55℃ —90℃
	Shock resistance	1~500hz
standard test	Usability test	gbt26225
	weight	56g

Remarks: Tests and data are based on the Indilinx standard experimental test environment. Consumer-grade host test data may have errors.