


pm.2-Product specification

Dimensions:

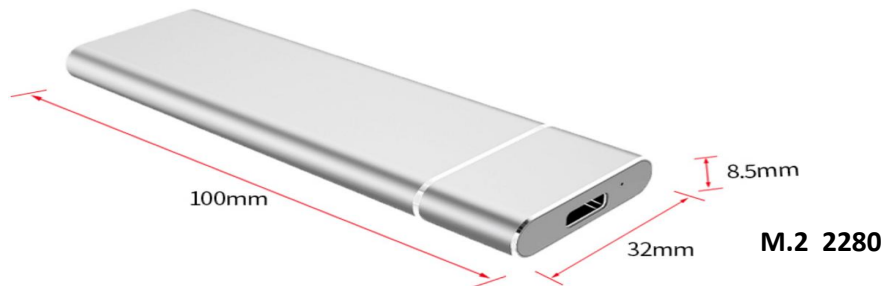

M.2 2242



56mm x 32mm x 8.5mm


Features:

- 1.Delicate and compact, Aluminum Alloy, Easy to dissipate heat and fall protection.
- 2.Use m.2 ssd as the storage subject, which is more stable.
- 3.Type-c interface, suitable for a variety of environments, faster and more stable
- 4.Phison s11 master control, safer and more stable.
- 5.Micron chips, original gooddie, which's durable.
- 6.10 times higher reading and writing speed than HDD, Feel better
- 7.Integrated testing, high temperature aging, safer,and more secure.

Capacity	128g	256g	512g	1t	Master/Chips
Read	400m/s	450m/s	470m/s	500m/s	ps s-11
Write	300m/s	350m/s	380m/s	420m/s	Micron/Toshiba
Input voltage	5V±5%	5V±5%	5V±5%	5V±5%	
Input Current	500ma/h	500ma/h	500ma/h	500ma/h	

Test Data

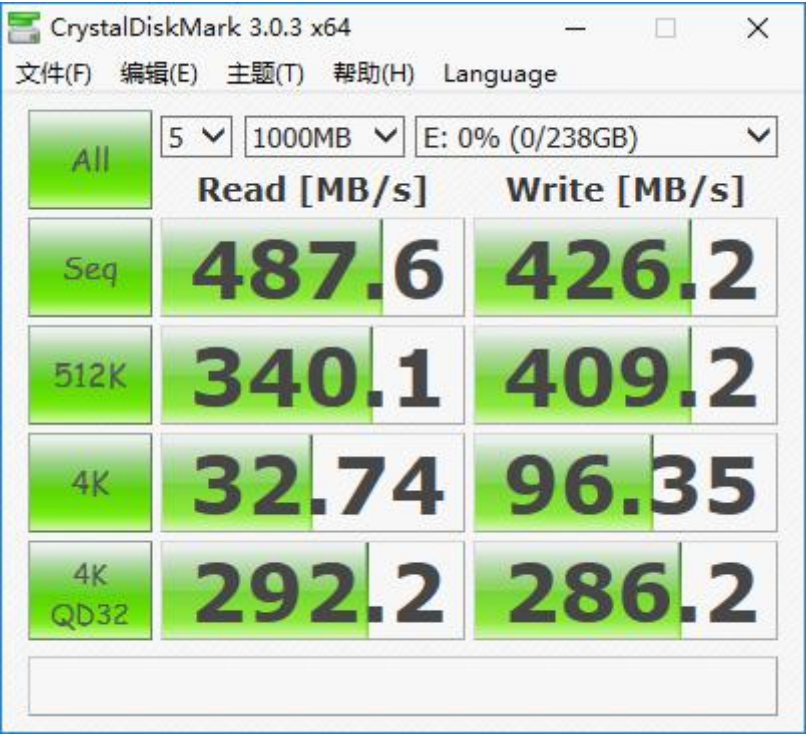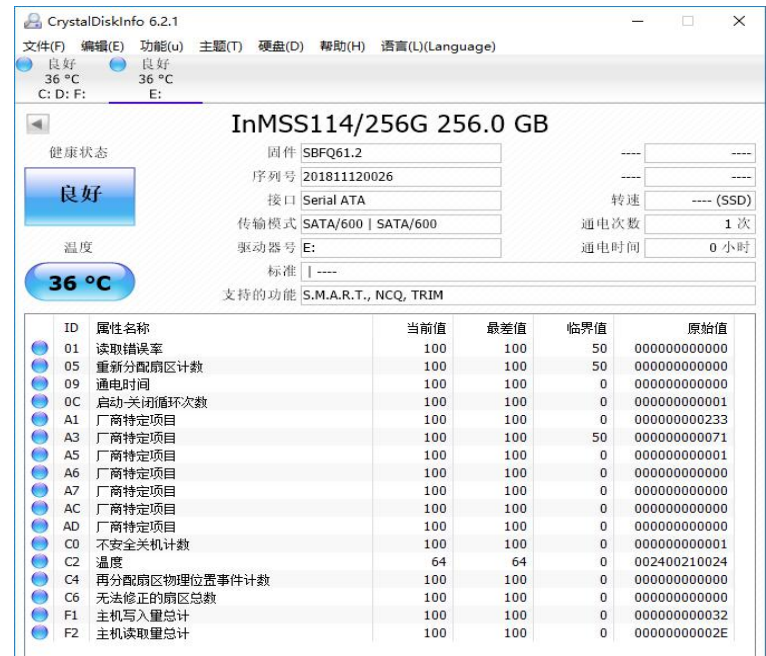

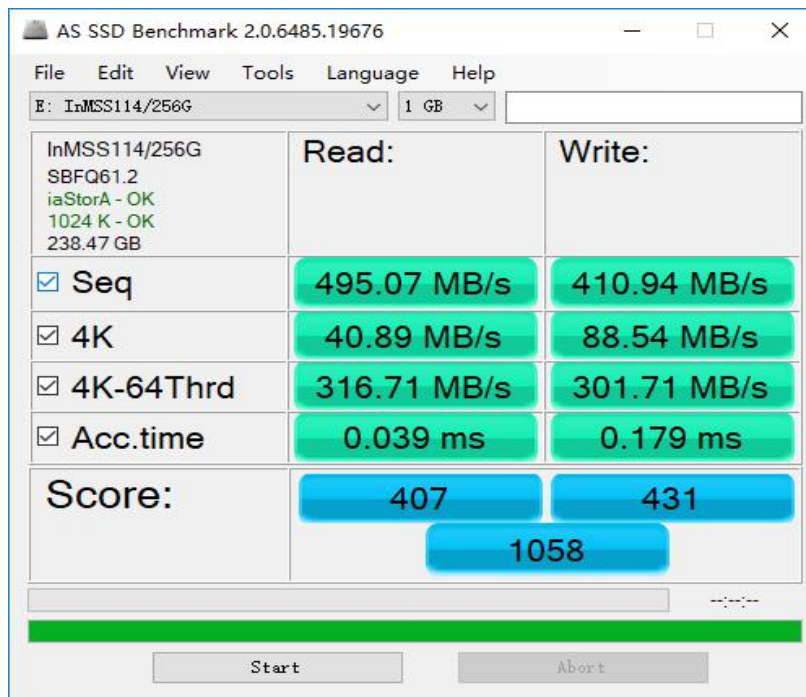

Protection Features	Overload	Overload protection from 110% to 115% of rated power, protection mode, disconnection
	Overvoltage	overvoltage protection from 110% to 115% of rated voltage, protection mode, disconnection
	Over temperature	-55℃- 90℃, exceeding the temperature start temperature protection.
circumstance	Operating temperature	-55℃—90℃
	Shock resistance	1~500hz
standard test	Usability test	gbt26225
	weight	65g

Remarks: Tests and data are based on the Indilinx standard experimental test environment. Consumer-grade host test data may have errors.